



Architectural MSA

MSA 2500 DE UNP

The high luminous efficacy and optimal lamp filling of the double ended Architectural MSA lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Product data

• General Characteristics

System Description	Double Ended
Cap-Base	(P)SFC
Operating Position	p15
Main Application	Architectural
Life to 50% failures	2500 hr
EM	

• Light Technical Characteristics

Color Code	856
Color Rendering Index	90 Ra8
Color Temperature	5600 K
Color Temperature Technical	5600 K
Chromaticity Coordinate X	330 -
Chromaticity Coordinate Y	360 -
Luminous Flux Lamp EM	250000 Lm
Luminous Efficacy Lamp EM	100 Lm/W

• Electrical Characteristics

Lamp Wattage	2500 W
Lamp Wattage Technical	2500 W
Lamp Current	22.5 A

Ignition Supply Voltage	198 (min) V
Dimmable	No

• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	980 (max) C

• Product Dimensions

Overall Length C	364 (max) mm
Diameter D	41 (max) mm
Arc Length O	25 mm

• Product Data


Order code	928099405103
Full product code	928099405103
Full product name	MSA 2500 DE UNP
Order product name	MSA 2500 DE UNP/1
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8718291548300
Bar code on outerbox - EAN3	8711500202086
Logistic code(s) - 12NC	928099405103
Net weight per piece	0.245 kg

PHILIPS


Dimensional drawing

MSA 2500 DE UNP


Product	C (Max)	D (Max)	L (Max)	O (Norm)
MSA 2500 DE	364	41	-	25

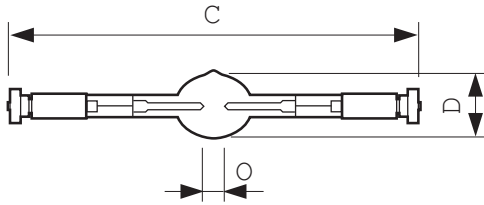

Photometric data

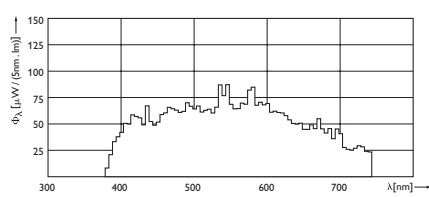

MSA 2500 DE

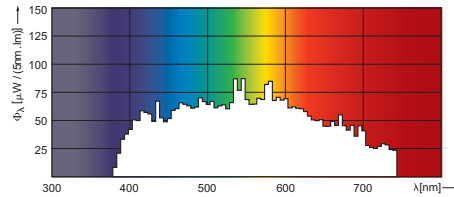

MSA 2500 DE



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change