

# MASTERCcolour CDM-T

MASTERCcolour CDM-T 150W/830 G12 1CT

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light



## Product data

### • General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EM	9000 hr
Life to 5% failures EL	9000 hr
Life to 10% failures EM	10000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EM	11000 hr
Life to 20% failures EL	11000 hr
Life to 50% failures EM	12000 hr
Life to 50% failures EL	12000 hr

### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	88 Ra8
Color Designation (text)	Warm White
Color Temperature Technical	3000 K
Luminous Flux Lamp EM	13200 Lm
Luminous Flux Lamp EL	13600 Lm
Luminous Efficacy Lamp EM	90 Lm/W

Luminous Efficacy Lamp EL	91 Lm/W
Lumen Maintenance EM 2000h	75 %
Lumen Maintenance EL 2000h	75 %
Lumen Maintenance EM 5000h	65 %
Lumen Maintenance EL 5000h	70 %
Lumen Maintenance EM 10000h	50 %
Lumen Maintenance EL 10000h	60 %
Design Mean Lumens EL	9600 Lm
Design Mean Lumens EM	8900 Lm
Chromaticity Coordinate X	0.436 -
Chromaticity Coordinate Y	0.396 -

### • Electrical Characteristics

System Power EM	165 W
System Power EL	167 W
Lamp Wattage	150 W
Lamp Wattage EM 25°C, Nominal	150.0 W
Lamp Wattage EM 25°C, Rated	147.0 W
Lamp Wattage EL 25°C, Rated	150.0 W
Lamp Wattage EL 25°C, Nominal	150.0 W
Lamp Voltage	96 V

**PHILIPS**

# MASTERColour CDM-T

Lamp Current EM	1.8 A
Lamp Current EL	1.62 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Ignition Peak Voltage	3500 (min) V
Re-ignition Time [min]	15 (max) min
Dimmable	No

## • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	14.25 mg
Energy consumption kWh/1000h	165 kWh

## • UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.3 (max) - 8 (min) h500lx
--------------------------------	----------------------------

## • Luminaire Design Requirements

Cap-Base Temperature	280 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	650 (max) C

## • Product Dimensions

Reference Length A	96 (max) mm
--------------------	-------------

Overall Length C	110 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	9 mm
Light Center Length L [inch]	2.21875 in
Overall Length C [inch]	4.34375 (max) in
Diameter D [inch]	0.75 in

## • Product Data


Order code	928083705125
Full product code	928083705125
Full product name	MASTERColour CDM-T 150W/830 G12 1CT
Order product name	MASTERC CDM-T 150W/830 G12 1CT
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500197801
Bar code on outerbox - EAN3	8711500197818
Logistic code(s) - 12NC	928083705125
ILCOS code	MT/UB-150/830-H-G12-21/100
Net weight per piece	33.000 gr

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.

## Dimensional drawing

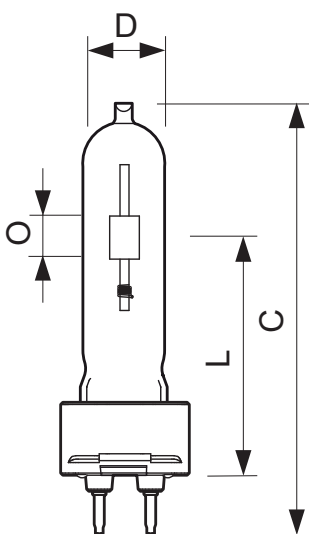

## MASTERColour CDM-T 150W/830 G12 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T 150W/830 G12	110	20	55	56	57	9

## Dimensional drawing



G12

## Photometric data

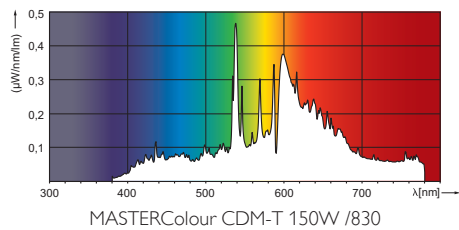

© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, February 23  
data subject to change